




1 DEMOLITION FLOOR PLAN  
1/4" = 1'-0"

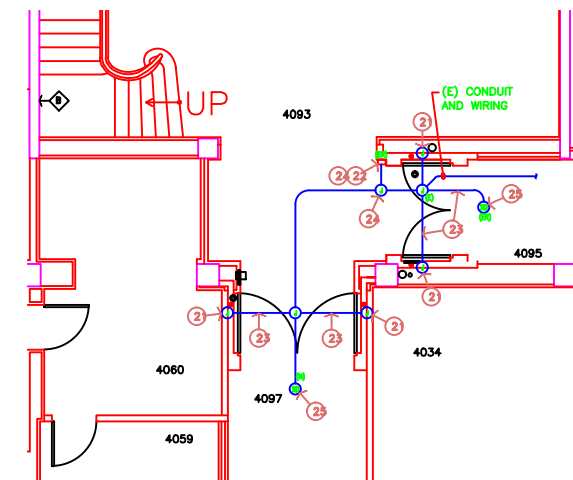

3 FLOOR PLAN  
1/4" = 1'-0"

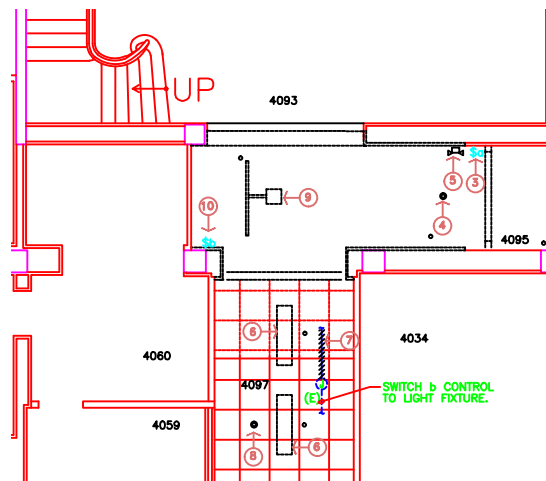

2 DEMOLITION CEILING PLAN  
1/4" = 1'-0"

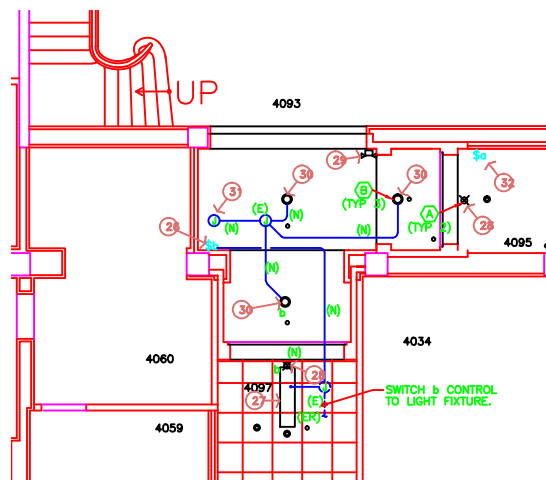

4 CEILING PLAN  
1/4" = 1'-0"

#### FIXTURE SCHEDULE

FIXTURE CODE	DESCRIPTION
A	EXIT SIGN WITH GREEN LED LETTERS AND DC BATTERY BACK-UP, 120VAC, 1 PH, IN ALUMINUM HOUSING, POLYCARBONATE DIFFUSER WINDOW, SINGLE FACE, TYPE GILBERT CAT # LED-1-EM-G-W-BPR-120VAC.
B	RECESSED DOWN LIGHTING FIXTURE, 120VAC, 1 PH, TYPE HALO CAT # H7701T-1640BA WITH 100W-A19 LAMP.
C	

#### GENERAL NOTES

1. SEAL ALL THRU-WALL PENETRATIONS IN RATED CONST. W/ U.L. RATED FIRE-STOP SYSTEMS.
2. PATCH & FINISH, OR REPLACE, ALL WORK DAMAGED DURING CONSTRUCTION TO MATCH EXISTING.
3. TURN-OFF ALL POWER CIRCUITS BEFORE DISCONNECTING DEVICES AND FIXTURES.

#### LEGEND

- (E) EXISTING  
(ER) EXISTING RELOCATED  
(N) NEW

#### SHEET NOTES

##### DEMOLITION NOTES:

- 1 REMOVE FIRE ALARM PULL BOX FOR RELOCATING LATER.
- 2 (E) ELEC. ACCESS COVER TO REMAIN.
- 3 REMOVE LIGHT SWITCH TO BE RELOCATED. PULL BACK WIRING IN CEILING UP TO FIRST PULL BOX.
- 4 REMOVE SMOKE DETECTOR TO BE RELOCATED. PULL BACK WIRING IN CEILING PULL BOX.
- 5 REMOVE EMERGENCY LIGHT FIXTURE & RESPECTIVE WIRING UP TO CEILING PULL BOX.
- 6 REMOVE LIGHT FIXTURES, STORE ONE UNIT FOR RELOCATION.
- 7 REMOVE WIRE AND CONDUIT TO THE FIXTURE PULL BOX. MAINTAIN POWER TO THE OTHER FIXTURES.
- 8 (E) HEAT DETECTOR TO REMAIN.
- 9 REMOVE TRACK LIGHT, CONDUIT & J-BOX. LEAVE WIRING IN CEILING FOR CONNECTION LATER.
- 10 REMOVE LIGHTING SWITCH FOR INSTALLATION LATER.
- 11 DISCONNECT EXISTING DOOR HOLDER WIRING AND PULL BACK FOR FUTURE CONNECTION.

##### CONSTRUCTION NOTES:

- 21 CONDUIT & J-BOX IN PARTITION FOR MAG. H.O. TO BE PROVIDED & INSTALLED BY OTHERS. REFER TO ARCHITECTURAL DWGS FOR LOCATION.
- 22 RELOCATE FIRE ALARM PULL BOX, RECESS TO EXTEND POSSIBLE.
- 23 EXTEND EXISTING FIRE ALARM WIRING FOR ZONE 1G59. PULL NEW WIRING TO RM 4097 DOOR HOLDERS. SEE DWG. 0550E027, REV E FOR WIRING DIAGRAM.
- 24 EXTEND EXISTING ZONE 1G54 WIRING FROM FCB IN OLD LOCATION TO NEW LOCATION.
- 25 RELOCATE EXISTING SMOKE DETECTOR.
- 26 RELOCATE LIGHT SWITCH CONTROLLING FIXTURES IN HALLWAY 4097.
- 27 RELOCATE LIGHT FIXTURE. EXTEND EXISTING CIRCUIT FROM THE SWITCH "b".
- 28 INSTALL 2#12+1#12G IN 3/4" CONDUIT TO (N) EXIT SIGN FIXTURE.
- 29 EXTEND EXISTING WIRING (2#12+1#12G) TO RELOCATED EMERGENCY LIGHT FIXTURE.
- 30 EXTEND EXISTING CIRCUIT (2#12+1#12G) TO CONNECT RECESSED AND FLOOD LIGHT FIXTURES IN ITEM 31.
- 31 AIM FLOOD LIGHT FIXTURES TOWARD NOBEL LAUREATES'S NICHE. HOLD FOR FIXTURE TYPE. PROVIDE A PULL BOX WITH (2#12+1#12G) ON THE SAME CIRCUIT AS THE LOBBY FIXTURES AND CAP WIRE ENDS.
- 32 RELOCATE LIGHT SWITCH CONTROLLING FIXTURES IN HALLWAY 4095.

#### 50 1st FLOOR CORR. 4097 SITEWIDE FIRE & LIFE SAFETY PLANS

UNIVERSITY OF CALIFORNIA LAWRENCE BERKELEY LABORATORY  
FACILITIES DEPARTMENT

DESIGNED BY	RYT	DATE	11/08/98
CHECKED BY	MCQ	DATE	11/11/98
APPROVED BY	MCQ	DATE	11/11/98
CON FILE NO.	05007364		
SCALE	1/4"=1'-0"		
PROJECT NO.	4850E056A		
PROJECT NO.	120287		

E1  
1 OF 1